


SUPER CELL RUBBER FENDER PERFORMANCE SPEC.


NANHAI is the international leading marine fender manufacturer with 20 years in fender production. NANHAI Rubber Fender design and manufacture according to PIANC 2002 "Superior Guarantee, Supreme Guard"



R/F:KN E/A:KN-M		RL		RO		RH		RS		RE	
		RATED DEFLECTION 52.5%	MAX DEFLECTION 55%	RATED DEFLECTION 52.5%	MAX DEFLECTION 55%	RATED DEFLECTION 52.5%	MAX DEFLECTION 55%	RATED DEFLECTION 52.5%	MAX DEFLECTION 55%	RATED DEFLECTION 52.5%	MAX DEFLECTION 55%
400H	R	51	59	64	75	83	97	96	112	110	125
	E	9	9.5	11	12	14	15	17	18	19	21
500H	R	86	99	108	125	140	160	162	187	182	210
	E	18	19	23	25	30	32	36	38	40	43
630H	R	138	147	172	182	224	237	258	274	290	309
	E	38	40	48	50	62	67	72	76	80	85
800H	R	211	225	275	292	355	378	412	437	464	493
	E	75	78	98	102	125	132	145	153	163	173
1000H	R	349	372	436	463	567	603	655	696	737	784
	E	153	163	195	203	249	264	287	304	324	343
1150H	R	462	491	578	614	750	798	865	920	975	1037
	E	233	247	297	309	379	401	437	463	492	521
1250H	R	546	581	682	725	886	942	1022	1087	1153	1225
	E	299	316	382	396	486	516	561	594	632	669
1450H	R	735	781	918	976	1193	1269	1376	1464	1551	1649
	E	468	495	596	619	760	804	876	928	987	1045
1600H	R	894	950	1117	1189	1453	1544	1676	1781	1888	2007
	E	628	665	801	832	1020	1080	1177	1247	1326	1405
1700H	R	1009	1073	1262	1342	1640	1743	1892	2012	2131	2266
	E	753	798	960	997	1224	1300	1413	1495	1591	1685
2000H	R	1398	1485	1746	1856	2270	2413	2619	2783	2941	3136
	E	1227	1299	1564	1624	1994	2111	2300	2435	2591	2743
2250H	R	2085	2216	2454	2607	3188	3390	3679	3911	4145	4406
	E	2060	2180	2472	2566	3150	3336	3628	3848	4095	4337
2500H	R	2574	2737	3028	3220	3937	4182	4543	4829	5118	5441
	E	2826	2992	3391	3520	4322	4576	4987	5280	5618	5949
3000H	R			3750	4217	4482	5099				
	E			4300	4635	5160	5510				

*Other performances are available on customer's requests

- RE: Extreme high Reaction Force
 - RS: Super high Reaction Force
 - RH: High Reaction Force
 - RO: Standard Reaction Force
 - RL: Low Reaction Force
 - R: Reaction Force
 - E: Energy Absorption
- Performance tolerance: ±10%

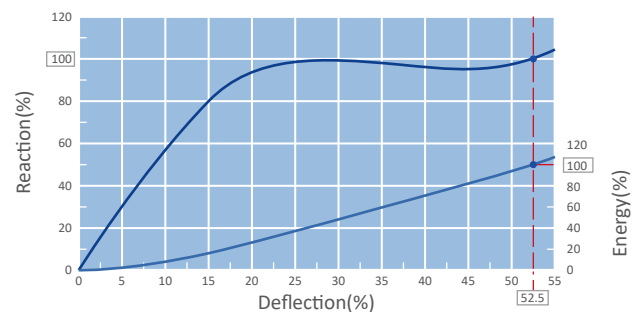

SHANDONG NANHAI AIRBAG ENGINEERING CO.,LTD.

NO.5608 Shuangshan North Road,Zhangqiu District,Jinan City, Shandong,China.

www.airbag.cc | + 86 531-88723323 | info@airbag.cc